Micro Projector Lift

- The Micro Projector Lift (MPL) is small and convenient, just like the projectors it is designed to accommodate. *U.S. Patent Nos. D395,909 and 6,637,711. Other patents pending.*
- Lifting capacity of 35 lbs. (15.9 kg) MPL can be installed in an existing 2′ x 2′ (60 cm x 60 cm) ceiling opening without disturbing the ceiling framework.
- All components can be serviced from below the unit. The projector's "show" position can be set at any point with infinite adjustability, up to 48″ (122 cm) extension.
- The Micro Projector Lift utilizes the same exclusive 3-scissor design as Draper's popular Scissor Lift, but features a compact side-folding scissor.
- The load is lifted by two 1″ wide Kevlar® straps. Safety belt provides extra protection. Closed height of lifting unit is only 5″ tall (not including projector, mounting mechanism or closure), so a minimal amount of overhead ceiling space is required. *Kevlar® is a registered trademark of DuPont.*

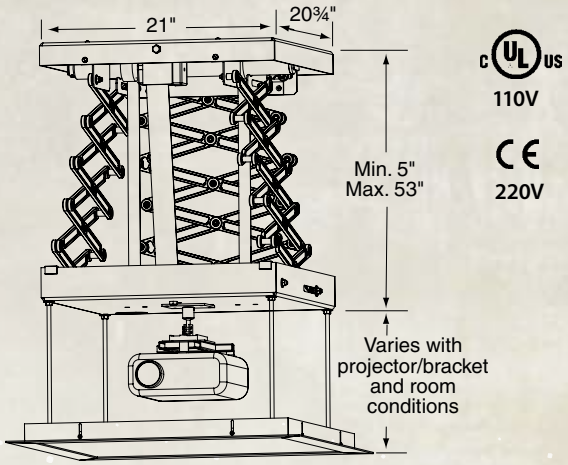

c UL us
110V
CE
220V

Detailed dimensions available at:
www.draperinc.com/go/MPL.htm

Micro Projector Lift—Dimensions and Data

Height of lift in closed position [1]	5″ (13 cm)
Overall lift dimensions (W x L)	21″ x 20¾″ (53 cm x 53 cm)
Ceiling opening	23½″ x 23½″ (60 cm x 60 cm)
Max. projector size (W x L) [2]	20″ x 20″ (51 cm x 51 cm)
Max. down travel	4′ (122 cm)
Capacity	35 lbs. (16 kg)
Net weight of lift	35 lbs. (16 kg)

[1] Not including projector, mount/bracket or optional closure.
[2] Max. available projector/bracket height (with Environmental Air Space Housing): 13½″ (34 cm)
Min. available projector/bracket height (with Environmental Air Space Housing): 5½″ (14 cm)

Options

- **Ceiling Closure Panel**—White closure panel is optional and can be adapted to attach ceiling tile.
- **Environmental Airspace Housing**—Aluminum housing isolates projector from environmental airspace above ceiling. Does not include ceiling closure panel.
- **Ceiling Finish Kit**—Ceiling closure panel and ceiling trim ring to finish ceiling opening.
- **Factory-Installed Cables**—for RGBHV, Video and Control.
- **Ceiling Access Door**—A 2′ x 2′ (60 cm x 60 cm) hinged door provides access to the MPL above a finished ceiling. Available with a white painted finish or recessed to accept ceiling tile.
- **Universal Projector Mount**—Provides secure and simple mounting for most projectors up to 25lbs. (12kg). See page 6.
- **Controls**—Can be independently operated with a variety of Draper motorized lift controls.

Greensboro, GA residence from Electronic House feature July/August 2010 Home of the Month, Photographer: Joseph Hilliard, Elkhart, IN